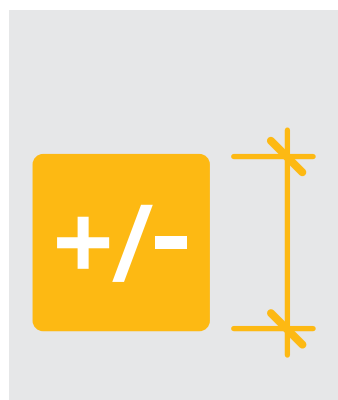
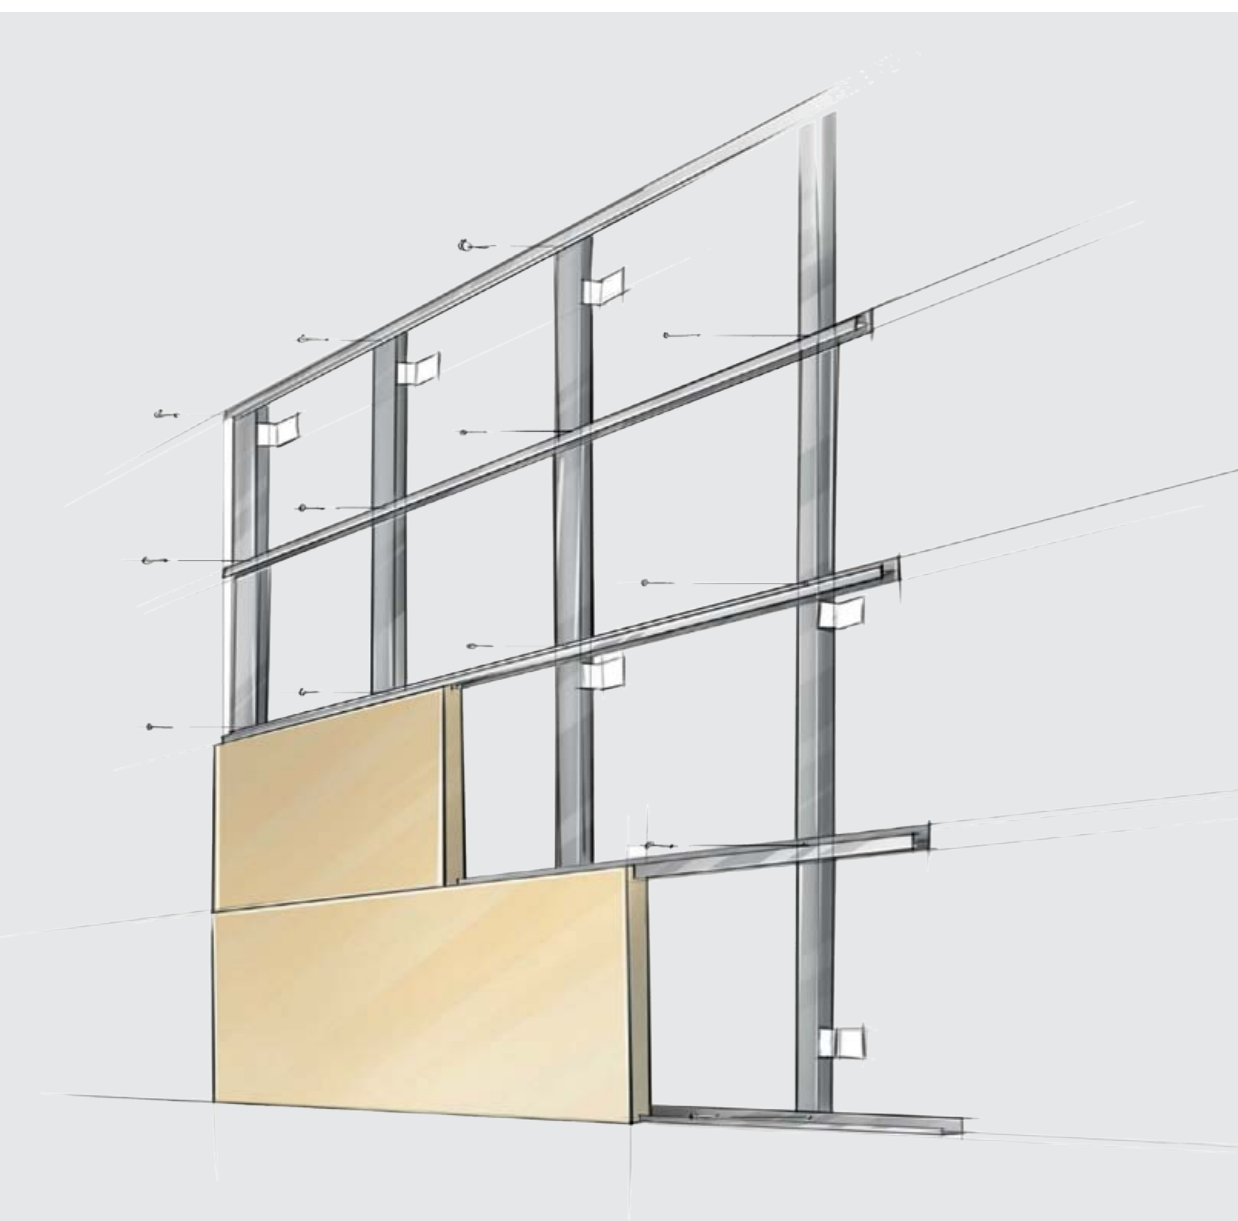




Heradesign®

Product data

HERADESIGN® superfine



Product data

HERADESIGN® superfine

Single layer layer magnesite-bonded wood wool acoustic panel (Fibre width 1 mm).

With high quality surface structure, building biology recommended.

Colour variants

The natural characteristic structure of the wood wool is ideally suitable as a surface for creative colour schemes. An almost unlimited range of colours is available - almost any colour from popular colour systems such as RAL or NCS, may be selected.

Nominal dimensions [mm]	600 x 600, 625 x 625, 1200 x 600, 1250 x 625		
Thickness [mm]	15	25	35
Weight [kg/m ²]	7.8	11.3	15.0
Sound absorption value α_w up to 1.00			
Reaction to fire according to DIN 13501-1: B-s1, d0			
Designation code: WW-EN 13168-L4-W2-T2-S2-P2-CI3			
General Building Authority Approval: Z-23.15-1562			
Declaration of performance under www.knaufamf-dop.com			

White similar to RAL 9010	beige Natural tone 13	Pastel colours	Solid colours	Metallic colours	Special colours
●	●	●	●	●	●

Areas of application

As decorative and acoustically effective sub-ceiling and wall cladding for use in interior rooms and roofed outdoor areas, which are not exposed to direct environmental influences such as rain or pollutants.

Limitations of use

- Maximum span 625 mm!
- Suitable for rooms with a constant humidity of up to 90%. For applications where there is a constant humidity in excess of 80% construction physics advice is recommended!

Installation

Installation of HERADESIGN® acoustic panels is part of the interior fitting of the building and must only be carried out under conditions of controlled humidity and temperature. All building activities which create dust must be completed before the start of installation. Store the panels flat and protect against moisture and dirt. The packaging does not protect the products against rain! Also note the relevant application, installation and storage guidelines for HERADESIGN® acoustic panels.

Special information

- Deviations in colour from the edge colour and colour perception are possible due to the rough surface of the fibres or the surface of the panel.
- Manufacturing tolerances in nominal dimensions: L4, W2, T2: ± 1 mm, for lengths > 1250 mm L4: ± 2 mm
- Max. changes in dimension in standard climate 23° C/50 % rel. humidity: ±1 %
- Edge design AK-01




This product information corresponds to the present state of development of our products and become invalid on the publication of a new version. Always make sure that you use the latest version of this information. The suitability of the product is not binding for special individual cases. Warranties and liability for deliveries are governed by our General Terms of Business. All data are included without warranty. Version 01/2018 - JB

Overview of test reports

Ball impact resistant ceiling panelling according to DIN 18 032 / part 3 or EN 13964 Annex D

Construction	Product	Substructure		Center distance support profile	Installation	Fastening	Test report No.
	HERADESIGN® superfine Thickness : 25 mm Format: 1250 x 625	CD sections 60x27x0,6 mm	Double layer	≤ 625 mm	Transverse to substructure	HERADESIGN® screw 9 pcs/panel	902 6000 000/22/Sc/Whr MPA Stuttgart
	HERADESIGN® superfine Thickness : 25 mm Format: 1250 x 625	Wooden battens 60x30 mm	Double layer	≤ 625 mm	Transverse to substructure	HERADESIGN® screw 9 pcs/panel	902 6000 000/3/Sc/Whr MPA Stuttgart
	HERADESIGN® superfine Thickness : 35 mm Format: 1250 x 625	CD sections 60x27x0,6 mm	Double layer	≤ 625 mm	Transverse to substructure	HERADESIGN® screw 9 pcs/panel	902 6000 000/27/Sc/Whr MPA Stuttgart
	HERADESIGN® superfine Thickness : 35 mm Format: 1250 x 625	Wooden battens 60x30 mm	Single layer	≤ 625 mm	Transverse to substructure	HERADESIGN® screw 9 pcs/panel	902 6000 000/13/Sc/Whr MPA Stuttgart
	HERADESIGN® superfine Thickness : 35 mm Format: 1250 x 625 Kante: SY-02	Halteprofil		≤ 625 mm	-	HERADESIGN® Halteprofil	902 9567 000/16/Sc/Whr MPA Stuttgart

Ball impact resistant wall panelling according to DIN 18 032 / part 3


Construction	Product	Substructure		Center distance support profile	Installation	Fastening	Test report No.
	HERADESIGN® superfine Thickness : 25 mm Format: 1250 x 625	CD sections 60x27x0,6 mm	Double layer	≤ 312,5 mm	Transverse to substructure	HERADESIGN® screw 9 pcs/panel	902 9567 000/5/Sc/Whr MPA Stuttgart
	HERADESIGN® superfine Thickness : 25 mm Format: 1200 x 600	Wooden battens 60x30 mm	Double layer	≤ 300 mm	Transverse to substructure	HERADESIGN® screw 9 pcs/panel	903 0762 000/6/Ma/H MPA Stuttgart
	HERADESIGN® superfine Thickness : 35 mm Format: 1250 x 625	Wooden battens 60x30 mm	Double layer	≤ 625 mm	Transverse to substructure	HERADESIGN® screw 9 pcs/panel	902 6000 000/1/Sc/Whr MPA Stuttgart
	HERADESIGN® superfine Thickness : 35 mm Format: 1250 x 625	Wooden battens 60x30 mm	Single layer	≤ 625 mm	Transverse to substructure	HERADESIGN® screw 9 pcs/panel	902 6000 000/4/Sc/Whr MPA Stuttgart
	HERADESIGN® superfine Thickness : 35 mm Format: 1250 x 625	CD sections 60x27x0,6 mm	Double layer	≤ 625 mm	Transverse to substructure	HERADESIGN® screw 9 pcs/panel	902 6000 000/2/Sc/Whr MPA Stuttgart
	HERADESIGN® superfine Thickness : 35 mm Format: 1250 x 625	CD sections 60x27x0,6 mm	Single layer	≤ 625 mm	Transverse to substructure	HERADESIGN® screw 9 pcs/panel	902 6000 000/3/Sc/Whr MPA Stuttgart
	HERADESIGN® superfine Thickness : 35 mm Format: 1250 x 625 Kante: SY-02	Halteprofil		≤ 625 mm		HERADESIGN® Halteprofil	903 0762 000/2/Ma/H MPA Stuttgart

Overview of test reports

Sound absorption values


Test specimen					Sound absorption coefficient α																											
Panel type	Thickness [mm]	TKH ¹⁾ [mm]	HERADESIGN® Acoustic lining		Frequencies [Hz], as												Frequencies [Hz], ap						entire range		Class							
			[mm]	Gross density [kg/m³]	100	125	160	200	250	315	400	500	630	800	1000	1250	1600	2000	2500	3150	4000	5000	125	250		500	1000	2000	4000	NRC	α_w	
without acoustic lining																																
HERADESIGN® superfine	15	15	0	-	0,03	0,03	0,06	0,07	3,00	0,13	0,18	0,23	0,28	0,34	0,44	0,58	0,78	0,92	0,97	0,90	0,73	0,73	0,05	0,10	0,25	0,45	0,90	0,80	0,40	0,30 (H)	D	
HERADESIGN® superfine	15	45	0	-	0,03	0,02	0,08	0,11	0,14	0,19	0,27	0,37	0,47	0,63	0,74	0,75	0,68	0,63	0,60	0,61	0,67	0,81	0,05	0,15	0,35	0,70	0,65	0,70	0,45	0,40 (MH)	D	
HERADESIGN® superfine	15	300	0	-	0,31	0,27	0,41	0,51	0,57	0,54	0,51	0,43	0,34	0,44	0,51	0,52	0,58	0,63	0,64	0,71	0,75	0,79	0,35	0,55	0,40	0,50	0,60	0,75	0,55	0,50 (LH)	D	
HERADESIGN® superfine	25	25	0	-	0,05	0,06	0,05	0,12	0,15	0,19	0,24	0,29	0,42	0,55	0,72	0,92	1,05	0,97	0,83	0,70	0,69	0,91	0,05	0,15	0,30	0,75	0,95	0,75	0,55	0,35 (MH)	D	
HERADESIGN® superfine	25	55	0	-	0,07	0,07	0,09	0,14	0,19	0,22	0,29	0,43	0,56	0,70	0,72	0,67	0,61	0,56	0,54	0,63	0,77	0,82	0,10	0,20	0,45	0,70	0,55	0,75	0,50	0,45 (MH)	D	
HERADESIGN® superfine	25	85	0	-	0,07	0,08	0,14	0,23	0,31	0,43	0,61	0,79	0,78	0,79	0,73	0,64	0,60	0,61	0,70	0,80	0,82	0,83	0,10	0,30	0,75	0,70	0,65	0,80	0,60	0,60 (H)	C	
HERADESIGN® superfine	25	125	0	-	0,09	0,13	0,17	0,26	0,39	0,54	0,76	0,87	0,83	0,81	0,69	0,62	0,62	0,64	0,79	0,82	0,88	0,76	0,15	0,40	0,80	0,70	0,70	0,80	0,65	0,65 (H)	C	
HERADESIGN® superfine, Screw mounting	25	200	0	-	0,14	0,25	0,37	0,49	0,71	0,81	0,77	0,71	0,59	0,48	0,61	0,68	0,71	0,76	0,77	0,89	1,01	0,84	0,25	0,65	0,70	0,60	0,75	0,90	0,70	0,70 (H)	C	
HERADESIGN® superfine, Inlay mounting	25	200	0	-	0,13	0,24	0,36	0,56	0,69	0,80	0,83	0,76	0,65	0,52	0,60	0,70	0,70	0,74	0,82	0,94	1,00	0,89	0,25	0,70	0,75	0,60	0,75	0,95	0,70	0,70 (H)	C	
HERADESIGN® superfine	25	300	0	-	0,22	0,34	0,41	0,45	0,59	0,51	0,49	0,42	0,33	0,44	0,49	0,50	0,59	0,63	0,67	0,70	0,79	0,82	0,30	0,50	0,40	0,50	0,65	0,75	0,55	0,50 (H)	C	
HERADESIGN® superfine	25	600	0	-	0,55	0,56	0,54	0,40	0,44	0,37	0,48	0,50	0,50	0,58	0,59	0,66	0,67	0,71	0,76	0,87	0,91	0,88	0,55	0,40	0,50	0,60	0,70	0,90	0,55	0,60 (H)	C	
HERADESIGN® superfine	35	35	0	-	0,07	0,11	0,16	0,18	0,22	0,30	0,39	0,50	0,69	0,93	1,04	1,05	0,91	0,79	0,75	0,87	0,97	0,95	0,10	0,25	0,55	1,00	0,80	0,95	0,65	0,55 (MH)	D	
HERADESIGN® superfine	35	65	0	-	0,09	0,10	0,13	0,20	0,27	0,33	0,42	0,58	0,72	0,81	0,80	0,72	0,64	0,64	0,68	0,86	0,88	0,86	0,10	0,25	0,55	0,80	0,65	0,85	0,55	0,55 (MH)	D	
with acoustic lining																																
HERADESIGN® superfine	15	45	30	50	0,08	0,12	0,17	0,33	0,45	0,59	0,80	0,90	1,02	1,03	0,95	0,84	0,80	0,77	0,76	0,78	0,84	0,89	0,10	0,45	0,90	0,95	0,80	0,85	0,75	0,75	C	
HERADESIGN® superfine	15	300	40	50	0,49	0,75	0,76	0,82	0,82	0,87	0,91	0,88	0,86	0,93	0,90	0,92	0,87	0,84	0,82	0,85	0,86	0,90	0,65	0,85	0,90	0,90	0,85	0,85	0,85	0,90	A	
HERADESIGN® superfine	25	50	25	90	0,07	0,12	0,18	0,38	0,53	0,76	1,06	1,12	1,16	1,10	0,99	0,93	0,85	0,83	0,91	1,00	1,08	0,98	0,10	0,55	1,00	1,00	0,85	1,00	0,85	0,85 (H)	B	
HERADESIGN® superfine	25	55	30	50	0,04	0,14	0,22	0,44	0,66	0,77	0,93	1,04	1,04	0,95	0,88	0,80	0,77	0,76	0,81	0,89	0,91	0,89	0,15	0,60	1,00	0,90	0,80	0,90	0,80	0,80	B	
HERADESIGN® superfine	25	85	50	50	0,22	0,29	0,51	0,79	0,99	0,98	1,03	0,99	0,89	0,87	0,86	0,84	0,86	0,87	0,91	0,92	0,93	0,87	0,35	0,90	0,95	0,85	0,90	0,90	0,95	0,90	A	
HERADESIGN® superfine	25	200	50	50	0,30	0,65	0,84	0,94	1,04	1,12	1,07	1,13	1,07	1,03	1,01	0,93	0,84	0,89	0,91	1,04	1,02	0,95	0,60	1,00	1,00	1,00	0,90	1,00	1,00	1,00	A	
HERADESIGN® superfine	25	200	100	50	0,52	0,76	1,23	1,16	1,20	0,99	0,99	0,99	0,96	0,90	0,87	0,82	0,80	0,82	0,87	0,97	1,01	0,95	0,85	1,00	1,00	0,85	0,85	1,00	0,95	0,90 (L)	A	
HERADESIGN® superfine	25	200	2 x 50	90	0,55	0,77	0,88	0,98	1,04	0,97	0,99	1,04	1,06	1,02	0,97	0,90	0,86	0,83	0,83	0,90	0,99	0,93	0,75	0,95	1,00	0,95	0,85	0,95	0,90	0,95	A	
HERADESIGN® superfine	25	225	200	50	0,58	1,03	0,95	0,94	0,97	0,97	1,02	1,04	0,98	0,95	0,89	0,88	0,87	0,87	0,89	0,96	1,01	0,94	0,85	0,95	1,00	0,90	0,90	0,95	0,95	0,95	A	
HERADESIGN® superfine + 43 µm PE film	25	225	200	50	0,56	0,82	0,73	0,76	0,79	0,86	0,92	0,97	0,95	0,95	0,93	0,93	0,93	0,95	0,98	1,00	0,92	0,87	0,70	0,80	0,95	0,95	0,95	0,95	0,95	0,95	A	
HERADESIGN® superfine + 0,47 mm hygrodiode	25	225	200	50	0,50	0,72	0,65	0,69	0,71	0,81	0,87	0,89	0,87	0,88	0,89	0,91	0,96	1,04	1,02	0,91	0,81	0,86	0,60	0,75	0,90	0,90	1,00	0,85	0,90	0,95	A	
HERADESIGN® superfine + 30 mm air gap + 43 µm PE film	25	255	200	50	0,60	1,01	0,96	0,93	1,00	0,99	1,02	1,00	0,96	0,87	0,85	0,87	0,87	0,93	0,89	0,89	0,95	0,91	0,85	0,95	1,00	0,85	0,90	0,90	0,95	0,90 (L)	A	
HERADESIGN® superfine + 30 mm air gap + 0,47 mm hygrodiode	25	255	200	50	0,65	0,92	0,91	0,89	1,02	0,95	0,91	0,92	0,87	0,86	0,92	0,98	0,94	0,82	0,77	0,82	0,95	0,87	0,85	0,95	0,90	0,90	0,85	0,90	0,90	0,90 (L)	A	
HERADESIGN® superfine	25	300	40	50	0,77	0,65	0,74	0,84	0,92	0,95	0,95	0,90	0,86	0,92	0,90	0,88	0,83	0,80	0,81	0,87	0,92	0,99	0,70	0,90	0,90	0,90	0,80	0,95	0,90	0,90	A	
HERADESIGN® superfine	25	600	40	50	0,58	0,79	0,76	0,78	0,82	0,75	0,89	0,91	0,91	0,90	0,88	0,85	0,82	0,84	0,87	0,98	1,02	0,95	0,70	0,80	0,90	0,90	0,85	1,00	0,82	0,90	A	
HERADESIGN® superfine	35	65	30	50	0,09	0,20	0,23	0,41	0,61	0,77	0,87	1,00	1,02	0,98	0,90	0,84	0,83	0,84	0,90	0,95	0,97	0,97	0,15	0,60	0,95	0,90	0,85	0,95	0,85	0,85	B	
HERADESIGN® superfine	35	100	30	50	0,22	0,25	0,41	0,73	0,95	1,11	1,10	1,03	0,93	0,78	0,71	0,72	0,78	0,91	0,97	0,93	0,88	0,93	0,30	0,95	1,00	0,75	0,90	0,90	0,90	0,85 (L)	A	
HERADESIGN® superfine	35	200	40	50	0,37	0,68	0,89	0,93	1,07	1,04	1,06	1,02	0,96	1,00	0,95	0,88	0,91	1,01	1,09	1,02	0,94	0,94	0,65	1,00	1,00	0,95	1,00	0,95	1,00	1,00	A	
HERADESIGN® superfine	35	300	40	50	0,54	0,74	0,79	0,84	0,87	0,92	0,92	0,89	0,89	0,92	0,92	0,91	0,88	0,89	0,91	0,98	1,01	1,00	0,70	0,90	0,90	0,90	0,90	1,00	0,90	0,90	A	

¹⁾ TKH: Total construction height: Lower edge of ceiling to lower edge of HERADESIGN® acoustic panel
NRC value: Average α_s over the frequencies (250 + 500 + 1000 + 2000):4, rounded to the next increment 0.05





Overview of test reports

Fire resistance duration

Construction	Product	Substructure	Mineral wool lining	Classification	Evidence	AbP No./Institut
	HERADESIGN® superfine Thickness: 25 mm	CD sectionse 60x27x0,6 mm	Auflage 2 x 50 mm Gross density: 90 kg/m³	EI 30 (a←b)	No. 3144/897/09 MPA Braunschweig D	P-MPA-E-16-005 MPA-NRW Erwitte
	HERADESIGN® superfine Thickness: 25 mm	Wooden battens 60x30 mm	Auflage 2 x 50 mm Gross density: 90 kg/m³	EI 30 (a←b)	No. 2100/035/15 MPA Braunschweig D	

Standard flank noise level difference as per DIN EN ISO 10848-2:2006

Construction	Description	Classification	Evidence
	HERADESIGN® superfine Thickness: 25 mm Einlegemontage im T-Schienenensystem Abhängöhe: 700 mm	Dn,f,w= 18 dB	P-BA 139-2009 Fraunhofer-Institut Stuttgart
	HERADESIGN® superfine Thickness: 25 mm Einlegemontage im T-Schienenensystem Abhängöhe: 700 mm HERADESIGN® Akustikaufage 40 mm (50 kg/m³)	Dn,f,w= 30 dB	P-BA 138-2009 Fraunhofer-Institut Stuttgart



Service, Support, Logistics – Centre of expertise in Europe and on-site sales networks worldwide



The acoustic ceiling specialist Knauf AMF, with its global sales and service network, offers on-site, solution orientated and timely advice for architects, specialist contractors, distributors and developers.

With us, you are always a ceiling solution ahead!

No responsibility or liability is accepted for the accuracy of the information provided.
Subject to change without prior notice.

01/2018

Knauf AMF GmbH & Co. KG
Elsenthal 15, 94481 Grafenau
Germany

Tel.: +49 8552 422-0

Fax: +49 8552 422-32

info@knaufamf.de

www.amfceilings.com

Knauf AMF Deckensysteme GmbH
9702 Ferndorf 29
Austria
Tel.: +43 4245 2001-0
office@heradesign.com
www.heradesign.com

Knauf AMF GmbH & Co. KG
Metallstraße 1, 41751 Viersen
Germany
Tel.: +49 2162 957-0
info-de@knaufamf.eu

Knauf AMF Plafonds et Systèmes
9, rue des Livraindières, 28100 Dreux
France
Tel.: +33 237 3850-50
info@knaufamf.fr

Knauf AMF Ceilings Ltd.
1 Swan Road, South West Industrial Estate,
Peterlee, Co. Durham, SR8 2HS
Great Britain
Tel.: +44 191 5188600
info@knaufamf.co.uk