



Linoleum
xfTM2

LINOVILLE

Get Close
to Lino





Linoville, is a visual expression of the qualities of linoleum that pull you into the world of linoleum and bring you closer to the product. With our enlarged collection of designs, our improved xf₂[™] surface treatment and acoustic options, come and discover linoleum like you have never seen before.

Linoville... Get close to Lino!



LINOVILLE. Closer to Nature p.4

LINOVILLE. Closer to Colour p.5

Veneto p.6

Grands classiques p.8

Style p.9

Etrusco p.10

LINOVILLE. Closer to Efficiency

xf² Improved
surface treatment p.11

Cleaning
and maintenance p.13

TECHNICAL DATA p.14

RANGE OVERVIEW p.15-16

SURFACE FINISHING & ACCESSORIES p.17



LINOVILLE. Closer to Nature!

THE NATURAL CHOICE FOR PEOPLE AND THE ENVIRONMENT

Natural, versatile and sustainable. Combining tradition, craftsmanship and innovation, Tarkett's linoleum offers a fresh approach to the flooring needs of today and lifestyles of tomorrow.

FOR A SUSTAINABLE FUTURE

We apply the Cradle to Cradle philosophy in the design and manufacture of our products. This ensures that waste produced can be reused either as raw materials for more linoleum or reused as nutrients in other products and that manufacturing processes preserve the environment as far as possible. We call it Circular Closed Looped Design.


- Linoleum is a modern solution to create sustainable buildings for the future.
- Environmentally-friendly ingredients, naturally bactericidal, with no added flame retardant in our standard range.
- Single homogeneous construction giving greater resistance to wear and durability over time.
- Increased flexibility in handling and installing thanks to its cork ingredient.
- Good indoor air quality through low emission levels.

A TRADITIONAL FLOORING MADE IN ITALY

Our linoleum is made in Italy with the same original recipe for over 115 years and sold across the world.

- Tarkett's teams have an intimate under-standing of the ingredients, their growing habitat, in order to adapt manufacturing to the variations of each year's crop.

- Every linoleum is seasoned for about 25 days, individually sampled by our experts to ensure that its natural characteristics are at their best.
- Our linoleum was the world's first to be awarded Silver Cradle to Cradle certificate for its sustainable approach.



100% linen

Our colour 100% linen is the **ONLY** linoleum awarded **C2C GOLD**



TARKETT AND SUSTAINABILITY: an everyday practice

Eco-design is at the heart of Tarkett's approach choosing the best ingredients that can be constantly reused in the production of our flooring and aiming for zero-waste to protect the environment.

In our Italian factory:

- 95% of the production scraps, all water needed for production is recycled.
- 95% of VOC emissions are abated and conveyed to a post combustor for generating energy.
- 20% is renewable energy, of which 13% is internal production (biomass boiler, geothermal system and photovoltaic panels) and 7% is external. Since 2014, thanks to a tri-generation system, Narni is able to produce autonomously part of the electricity, heating and cooling power from a single device (a gas engine) with a significant reduction of energy purchase from external supplier and CO² emissions, thus reinforcing our green performances to reach 2020 targets.





LINOVILLE. Closer to Colour!

Drawing on Tarkett's on-going trends analysis and colour expertise, we have created a rich collection of linoleum designs to meet the ambitions of any architectural project.

OPEN TO A WORLD OF COLOUR

Our ranges have been developed through consultation with architects across the world at every design phase. It has enabled Tarkett to perfect the right combination of colour, balance and structure for each design concept.

EXPLORING THE NEEDS OF TOMORROW

To anticipate how needs will change, our design teams explore emerging architectural, cultural and lifestyle trends. We share these insights in our Tarkett Observer studies that identify key orientations to enhance interior building design and user experience in healthcare, education and retail environments of the future.

TARKETT OBSERVER EDUCATION

In our latest trend analysis, we set out the fundamental contribution of colour and design in education. The colour universe of linoleum, in compact and acoustic solutions, can help create better learning environments from kindergarten, primary schools to university facilities.

OUR DESIGN ORIENTATIONS:

HUMAN INSIDE

- Creating social cohesion for a stimulating environment that improves focus and concentration.
- An environment that plays with graphic and colour codes to give meaning to each area.

INTERACTIVE SPACE

- Flexible and modular design to change perceptions of learning and stimulate creativity
- Tonic and bright colour range with materials and motifs that bring the present into the future.

GREEN VALUE

- Creating a first contact with eco-responsibility and integrating environmental awareness.
- Greens, browns and neutrals and materials that evoke Nature. Re-usability and recyclability.

TARKETT FLOORCRAFT

We offer a dedicated Floorcraft Service to create unique flooring concepts through highlighting visual inlays, colourways, zoning and directional design.




LINOVILLE. Closer to Colour!

VENETO a collection of strong and subtle marbled designs in soft or intense pattern variations for a timeless effect.


Our Veneto range includes:

- « 20 Grands Classiques* » a selection of 20 timeless colours among the 72 Veneto, that are guaranteed to be in production until 2033. All colours are available in 7 different specifications and with Tarkett's multicolour welding rods xF² (more details on p.8).
- All shades of the colour spectrum in a combination of neutral and contemporary accents.

VENETO - GREY

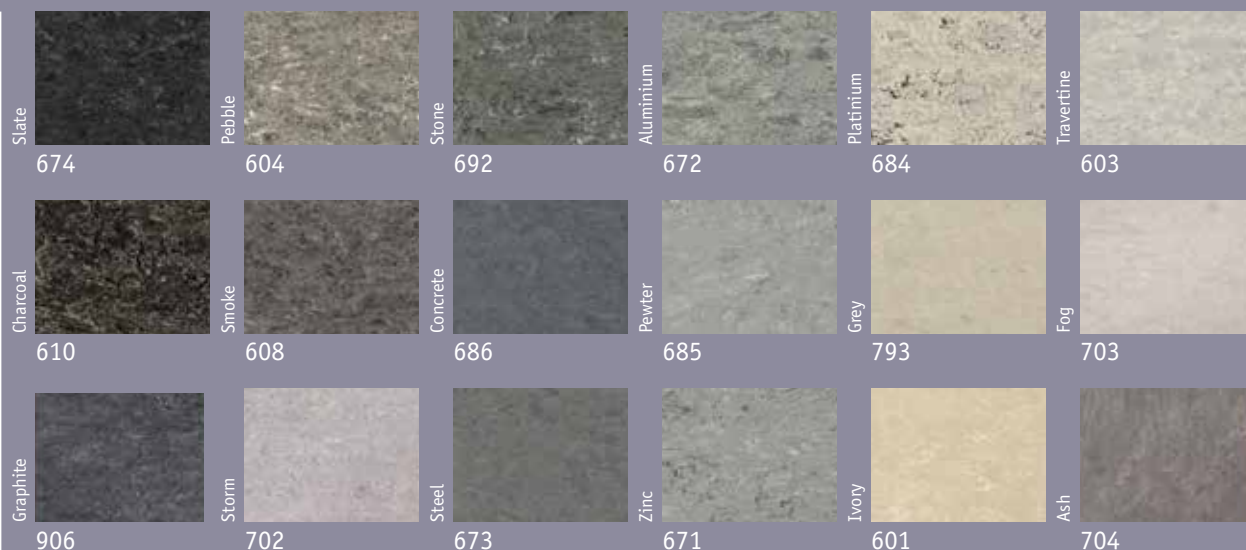

VENETO - BEIGE



*Eternal Classics



LINOVILLE. Closer to Comfort!

Customize your acoustic for comfort and well-being

LINOLEUM SILENCIO xf² - 18dB

To reduce impact and ambient noise and enhance underfoot comfort and well-being, Tarkett's Silencio xf² offers an acoustic linoleum solution with sound reduction of 18dB.

With a total thickness of 3.8mm, it's made in a two-layer construction of 2.5mm linoleum with a 1.3mm pre-bonded foam underlay. Available in all design options.

LINOLEUM ACOUSTIC CORK xf² AND ESSENZA - 15dB

The natural acoustic option, easy to install and to live with, is offered on demand in the following options:

a) Veneto xf² and Veneto Essenza: 2.5 mm linoleum with jute backing and Elafono cork underlayer

b) Veneto xf²: 2mm linoleum with jute backing and Elafono cork underlayer.


c) Style Emme xf²: 2.5 mm linoleum with jute backing and Elafono cork underlayer

These ready-to-install natural solutions provide a good acoustic insulation of 15dB – the best in the market with similar products – as well as high resistance to indentation.


ELAFONO – 14dB

To increase acoustic absorption, Tarkett also offers Elafono – a 2mm natural corkment underlay with a sound insulation up to 14dB, depending on the thickness – that can be installed in combination with any compact linoleum flooring.


VENETO - BLUE

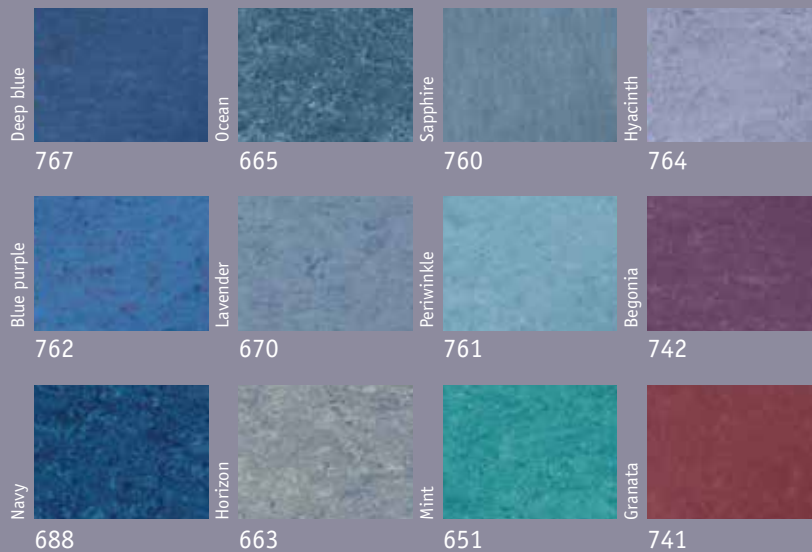

VENETO - GREEN

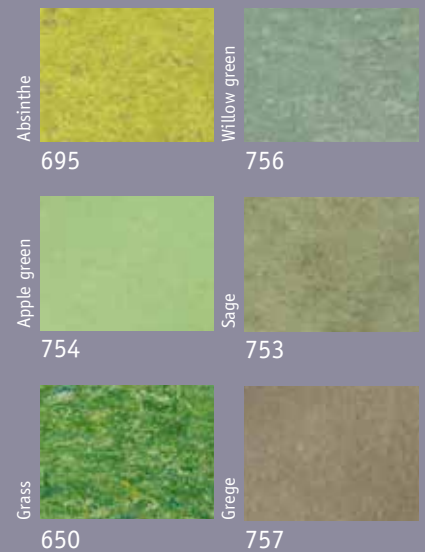

VENETO - RED

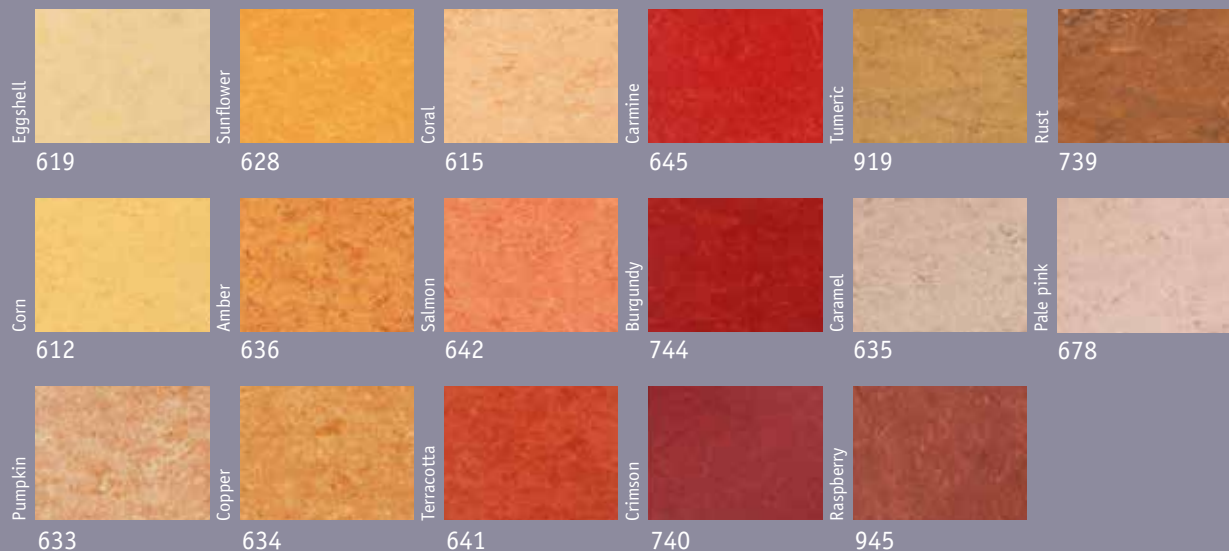

LINOVILLE. Closer to Colour!

GRANDS CLASSIQUES* a selection of 20 timeless colours that we guarantee in production until 2033.

20 colours are available in 7 different levels of traffic resistance with xf² surface treatment, and can be matched with our new range of multicolour welding rods for a perfect finish. This includes Sicuro R10 anti-slip and Essenza non-permanent surface finish. Grand Classiques designs are also available in acoustic option: Silencio - 18dB and Acoustic Cork 15dB.

- 2.0mm xf²
- 2.5mm xf²
- 2,5mm Essenza
- 2,5mm xf² R10 slip resistant rating
- 3.2mm xf²
- Silencio xf² 18 dB
- Acoustic Cork xf² & Essenza 15 dB
- Multicolour welding rods

GRANDS CLASSIQUES*	Ecrú		Sisal		Grey		Steel		Amber	
		711		611		793		673		636
	Camel		Zinc		Storm		Smoke		Terracotta	
		616		671		702		608		641
Horizon		663	Cork		Aluminium		Charcoal		Grass	
				679		672		610		650
Neutral		710	Corn		Pebble		Slate		Graphite	
				612		604		674		906

MULTICOLOUR WELDING RODS

For a virtually seamless finish, Tarkett has developed a new range of multicolour welding rods, designed to match the colour spectrum of our linoleum collection for the Grand Classiques colours. By including contrasting particles coordinated with the flooring's accent colour and design, they enable architects to achieve a continuous flowing flooring design. Now even easier and quicker to integrate, they can reduce installation time.



Unicolour welding rods versus Multicolour welding rods

STYLE a design range where the natural patterned beauty of linoleum meets modern style.

It's a subtle mix between contemporary colours and light marbled surfaces. Colours encompass cool and warm greys, shades of beige and brown, classic black and white, with vivid accent colours in red, green, yellow, orange and blue.



**SILENCIO xf²,
ACOUSTIC CORK xf²
& ESSENZA
and ELAFONO.**

We offer SILENCIO xf² and ELAFONO acoustic options with greater sound and thermal insulation available across all Tarkett linoleum colour designs. Plus ACOUSTIC CORK xf² & ESSENZA accross Veneto & Style EMME colour designs.

STYLE EMME a subtle marbling for refined and sophisticated styling.

STYLE ELLE a discrete directional linear design.

BEIGE & BROWN

STYLE EMME 208	STYLE ELLE 308
Sabbia	Sabbia
STYLE EMME 217	STYLE ELLE 317
Mokka	Mokka

COOL GREYS

STYLE EMME 205	STYLE ELLE 305
Ferro	Ferro
STYLE EMME 202	STYLE EMME 207
Cemento	Asfalto

BLACK & WHITE

STYLE EMME 200	STYLE ELLE 300
Materia	Materia
STYLE EMME 209	STYLE ELLE 309
Abisso	Abisso

WARM GREYS

STYLE EMME 203	STYLE ELLE 303
Velluto	Velluto
STYLE EMME 201	STYLE EMME 216
Cenere	Vulcano

VIVID ACCENTS

STYLE EMME 218	STYLE ELLE 318
Arancione	Arancione
STYLE EMME 219	STYLE ELLE 319
Giallo	Giallo

VIVID ACCENTS

STYLE EMME 214	STYLE ELLE 314
Rosso	Rosso
Verde	Verde
STYLE EMME 215	STYLE ELLE 315
Blue	Blue
STYLE EMME 220	STYLE ELLE 320

LINOVILLE. Closer to Colour!

ETRUSCO a contemporary linoleum range featuring fourteen deep and radiant colours.

Thanks to its deep colours and plain design, Etrusco xf² can be combined easily with any other type of pattern or used alone, for great design effects.



SILENCIO xf², and ELAFONO.

We offer acoustic options with greater sound and thermal insulation available across all Tarkett linoleum colour designs.

ETRUSCO	Black 098	Silver 003	Beige 002	Red Berlin 094	
	Red 041	Orange 037	Yellow 036	Anise 095	Rainforest 053
	Indigo 066	Cyan 061	Emerald 054	Iris 048	Anaranth 042





LINOVILLE. Closer to Efficiency!

A HARD-WEARING SOLUTION OVER ITS LIFETIME

For 150 years, linoleum flooring has been appreciated for its natural beauty, comfort, durability and versatility in most interior environments. Tarkett was an early innovator in surface treatments – adding xf² technology to its linoleum to improve resistance and simplify maintenance for significant cost savings in daily cleaning and care.

xf² for improved performance

Now, Tarkett is introducing xf² - its second generation surface treatment - increasing resistance for even longer durability and reducing maintenance for a highly cost-effective flooring.

- Micro-reinforced polyurethane UV treatment that seals and hardens the surface to make it more resistant to dirt and daily wear and tear.
- A smooth matt appearance that prevents accumulation of dirt or stains.
- No need for polish, stripping and polymer waxing over the lifetime of the surface*.

Superior resistance to abrasion

No other linoleum is as resistant to abrasion. We have conducted extensive internal and external laboratory testing to evaluate the resistance of xf² linoleum to abrasion over time. With the help of an electron microscope and 3D surface profilometer we are now able to see, magnified, the proof of the unbeatable resistance of xf². Tests were done on Competitors A, B and Tarkett samples, before and after dry abrasion by a rotation tumbler machine equipped with black pads. All linoleum are PU UV coated, following producers declarations. After 30 minutes, the test machine began to degrade the finish of Competitors' Samples A and B. Tarkett's test continued for one hour without visible finish degradation.

Resistance of xf² welding rods


The new formula developed by Tarkett enables us to produce welding rods – both multicolour and traditional unicolour - that offer exceptional resistance to all kinds of soiling and abrasion.



Competitor A, before abrasion



Competitor A, after abrasion



Competitor B, before abrasion



Competitor B, after abrasion



Tarkett xf², before abrasion



Tarkett xf², after abrasion

Source: university of Terri

After abrasion competitor A and B are destroyed when Tarkett xf² is still intact.

* Providing soil barriers are correctly put in place, regular maintenance is operated (daily vacuuming and mopping), furniture have appropriate leg coverings and daily surveillance.

LINOVILLE. Closer to Efficiency!

In addition to optimal durability and wear and tear resistance, Tarkett's new xf² surface treatment ensures an outstanding performance against soiling, staining to improve hygiene and simplify cleaning and maintenance. And we set out to prove it.

INHIBITING BACTERIAL GROWTH

Flooring contributes to ensuring hygienic environments in public buildings – from schools to hospitals where stain resistance to medical chemicals is mandatory for flooring materials.

Linoleum xf², with its sealed smooth surface, inbuilt resistance and naturally bactericidal qualities, can offer an effective solution.

REDUCED LIFE CYCLE COST FOR LINOLEUM xf²

The cost of the initial investment and installation normally represents just a small part of flooring's total life cycle cost. The rest is cleaning and maintenance. As the Linoleum xf² doesn't require first surface treatment after installation, neither regular wax or polish maintenance during its lifetime, consumption of water and detergent decrease significantly and give Linoleum xf² a very favorable life cycle cost.

Compared with Linoleum flooring treated with a non-permanent acrylic finish, payback on the extra investment could come within 2 months*.

For more information, please contact your Tarkett representative.

**Case study: school of 2000m² (class rooms 1300m² and corridors 700m²), comparison between untreated Linoleum and Linoleum xf². For 20 years life time, respecting cleaning and maintenance recommendations: entrance matting, regular cleaning, etc.*

With the same case study and conditions, cleaning and maintenance cost saving is about 20 to 25%. Water consumption is reduced about 30% and chemical consumption about 40%. This is a strong contribution to the environment.

SIMPLIFYING CLEANING AND MAINTENANCE

The reinforced surface of linoleum xf² means no polish, stripping and polymer waxing over the lifetime of the product**. As a result, it requires less frequent, less intense cleaning and maintenance and reduces use of water, energy and chemical detergents for a better environment footprint.



*** Providing soil barriers are correctly put in place, regular maintenance is operated (daily vacuuming and mopping), furniture have appropriate leg coverings and daily surveillance.*

CLEANING AND MAINTENANCE: NO POLISH, NO WAX NEEDED

Modern day-room cleaning aims to reduce wet cleaning procedures and replace them with drier cleaning techniques. For example, the use of centrally laundered pre-impregnated mops and the wide application of appropriate machines. This makes work more effective and easier for the cleaning staff, and minimizes environmental impact. Less cleaning chemicals and less fresh water are used.

1 Initial site cleaning



After installation initial site clean is required: vacuum, sweep or damp mop the area to remove building dust and loose dirt. A combined scrubber/dryer with brushes or red pads cleans large areas very effectively. Use detergent with a low pH (3-5).

xF² will be not removed by any cleaning operation.



2 Daily and regular cleaning



Remove dust and dirt with yarn or microfiber mops or disposable mops, dry or impregnated or vacuum the floor.

Use a mop dampened with water or detergent solution to remove spots. It is essential that water does not stay on the floor or leave a film. The floor should be virtually dry after 15-20 seconds. If required spray clean the floor with a rotary machine and red pad.



3 Periodic cleaning



Combined machine

Use diluted neutral detergent. Speed low 150-250 rpm or higher. Red/brown pads are usually most suitable.

or



+



+



Machine scrubbing + Wet vacuuming + Dry buffing

- Apply a cleaning solution (fairly strong, pH 10-11, after dilution) and allow to act for 5-10 min.
- Clean the floor using a heavy-duty single disc scrubbing machine (red pad). Vacuum up the dirty water immediately.
- Rinse with clean water and allow the floor to dry.
- If necessary dry buff (red pad) to restore gloss. Suitable speed: 500-1000 rpm.

Sharp edged /not maintained furniture feet, sand, pebbles, permanent push and drive movements on the same area will damage every kind of flooring over the time.

TRAINING

We provide a range of on-demand training for distributors, installers and maintenance teams on Tarkett products, installation and maintenance techniques as well as individual installation of key products for demonstration and discussion with customers.

We can deliver these worldwide in our own training facilities, such as the Tarkett Studio facility near Paris, or at customer sites. Our international technical advisers can also provide personalised training or support at the start of installation on building projects.

For more information about installation training or on-site assistance in your area, contact your Tarkett representative.

Specification

Linoleum homogeneous floorcovering made by one single layer calandered on jute backing. Composition: linseed oil, wood and cork flour, natural resins, pigments. Product standard: EN ISO 24011.



CERTIFICATION & CLASSIFICATION	STANDARDS	Veneto xf ² 2 mm	Veneto xf ² - Veneto xf ² B _a - Style Emme xf ² - Style Elle xf ² Veneto Essenza 2.5 mm	Veneto xf ² 3.2 mm	Veneto Sicuro xf ² 2.5 mm	Silencio xf ² 3.8 mm	Veneto Acoustic Cork xf ² 4.0 mm	Veneto Acoustic Cork xf ² Veneto Acoustic Cork Essenza xf ² Style Emme Acoustic Cork xf ² 4.4 mm	Etrusco xf ² 2.5 mm	SD Static Dissipative 2.5 mm
Type of floorcovering	EN 686					Linoleum on a foam backing				
	EN 687						Linoleum on a corkment backing	Linoleum on a corkment backing		
CE Certification	EN 14041	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Classification UPEC		U2SP2E1C2	U4P3E1/2C2	U4P3E1/2C2	U4P3E1/2C2	U4P3E1/2C2			U4P3E1/2C2	U4P3E1/2C2
Classification	EN ISO 10874 Domestic Commercial Light industrial	Classes: 23 32 41	Classes: 23 34 43	Classes: 23 34 43	Classes: 23 34 43	Classes: 23 33 41	Classes: 23 33 41	Classes: 23 34 42	Classes: 23 34 43	Classes: 23 34 43
TECHNICAL CHARACTERISTICS	STANDARDS									
Surface Treatment		xf ²	xf ² (acrylic Essenza)	xf ²	xf ²	xf ²	xf ²	xf ² (acrylic Essenza)	xf ²	xf ²
Total thickness	EN ISO 24346	2.0 mm	2.5 mm	3.2 mm	2.5 mm	3.8 mm	4.0 mm	4.4 mm	2.5 mm	2.5 mm
Total weight	EN ISO 23997	ca. 2 400 g/m ²	ca. 3 000 g/m ²	ca. 3 900 g/m ²	ca. 3 000 g/m ²	ca. 3 450 g/m ²	ca. 4 100 g/m ²	ca. 4 600 g/m ²	ca. 3 000 g/m ²	ca. 3 000 g/m ²
Residual indentation	EN ISO 24343-1	ca. 0.07 mm	ca. 0.08 mm	ca. 0.10 mm	ca. 0.08 mm	≤ 0.20 mm	≤ 0.25 mm	≤ 0.25 mm	ca. 0.08 mm	ca. 0.08 mm
Flexibility	EN ISO 24344 Method A	≤ 25 mm Ø	≤ 30 mm Ø	≤ 40 mm Ø	≤ 30 mm Ø	≤ 30 mm Ø	≤ 30 mm Ø	≤ 30 mm Ø	≤ 30 mm Ø	≤ 30 mm Ø
Form of delivery	EN ISO 24341	≤ 30 x 2 m	≤ 30 x 2 m	≤ 30 x 2 m	≤ 30 x 2 m	≤ 27 x 2 m or ≤ 27 x 1.95 m (subject to availability-please check upon order)			≤ 30 x 2 m	≤ 30 x 2 m
TECHNICAL PERFORMANCES	STANDARDS									
Fire classification	EN 13501-1	C _s s1	C _s s1 (B _s s1 for Veneto xf ² B _a)	C _s s1	C _s s1	C _s s1	C _s s1	C _s s1	C _s s1	C _s s1
Impact sound reduction	EN ISO 140-8 EN ISO 717-2	≤ 4 dB	≤ 6 dB	≤ 6 dB	≤ 6 dB	18 dB	15 dB	15 dB	≤ 5 dB	≤ 6 dB
Impact sound reduction with Elafono*	EN ISO 140-8 EN ISO 717-2	14 dB	14 dB	14 dB	14 dB	Not applicable	Not applicable	Not applicable	14 dB	Not applicable
Castor chair	EN ISO 4918	Suitable for office chairs with castors type W (Norm EN 12529)								
Static electrical propensity	EN 1815	< 2 kV	< 2 kV	< 2 kV	< 2 kV	< 2 kV	< 2 kV	< 2 kV	< 2 kV	< 2 kV
Electrical resistance	EN 1081	-	-	-	-	-	-	-	-	-
	ESD-approval SP method 2472 EN/IEC 61340-4-1	-	-	-	-	-	-	-	-	-
Electrical insulation	VDE 0100, Part 600	-	-	-	-	-	-	-	-	R _i > 5x10 ⁴ Ω
Slip resistance	EN 13893 DIN 51130	DS: ≥ 0.30 R9	DS: ≥ 0.30 R9	DS: ≥ 0.30 R9	DS: ≥ 0.30 R10	DS: ≥ 0.30 R9	DS: ≥ 0.30 R9	DS: ≥ 0.30 R9	DS: ≥ 0.30 R9	DS: ≥ 0.30 R9
Chemical resistance	EN ISO 26987	Resistant to dilute acids, oils, fats, current solvents and alkalis								
Thermal resistance	EN EN 10456	0.012 m ² K/W	0.015 m ² K/W	0.019 m ² K/W	0.015 m ² K/W	0.040 m ² K/W	0.042 m ² K/W	0.045 m ² K/W	0.015 m ² K/W	0.015 m ² K/W
Underfloor heating		Suitable	Suitable	Suitable	Suitable	Suitable	Suitable	Suitable	Suitable	Suitable
Light fastness	EN ISO 105-B02 Method 3	≥ 6	≥ 6	≥ 6	≥ 6	≥ 6	≥ 6	≥ 6	≥ 6	≥ 6
Determination of antibacterial activity		Yes, naturally	Yes, naturally	Yes, naturally	Yes, naturally	Yes, naturally	Yes, naturally	Yes, naturally	Yes, naturally	Yes, naturally
Colours		20	72 (Veneto) - 10 (Veneto xf ² B _a) 30 (Essenza) - 15 (Style Emme) - 11 (Style Elle)	20	29	112	20 on request	on request: 72 (Veneto) -	14 2 30 (Essenza) - 15 (Style Emme)	

The above information is subject to modification for the benefit of further improvement. (10/14).

CUSTOMS TARIFF : 482050000000F

DISCLAIMER: Although the utmost care is taken, the data here given could differ and be subject to modifications from a technical point of view.

In its strive to improve its floor solutions, Tarkett reserves the right to modify its technical specifications, colours and materials at any moment and without prior notice. Please, check the effective availability of the products presented at the time of order. Due to the technical limits of reproduction and printing techniques used, the appearance (colour) of the product may vary from the samples, panels or other visual display materials exhibited to the customer. It is mandatory to have the products installed properly if they are to service correctly and safely. Refer to Tarkett technical installation and maintenance directions, available at www.tarkett.com or at your Tarkett dealer.

***Elafono** : 2,0mm traditional, natural corkment underlay to be installed in combination with any compact Tarkett linoleum to get additional sound reduction (up to 14dB, depending on the product). Available in rolls ≤30 x 2m.

Veneto

TARKETT SUSTAINABILITY TAG

94 % 76 %

100 % 36 %

<100mg/m³

Better Indoor Air Quality

*TVOC AT 28 DAYS

Style

TARKETT SUSTAINABILITY TAG

96 % 74 %

100 % 30 %

<100mg/m³

Better Indoor Air Quality

*TVOC AT 28 DAYS

Silencio

TARKETT SUSTAINABILITY TAG

83 % 65 %

100 % 40 %

<100mg/m³

Better Indoor Air Quality

*TVOC AT 28 DAYS

Acoustic Cork

TARKETT SUSTAINABILITY TAG

93 % 77 %

100 % 33 %

<100mg/m³

Better Indoor Air Quality

*TVOC AT 28 DAYS

Etrusco

TARKETT SUSTAINABILITY TAG

93 % 77 %

100 % 34 %

<100mg/m³

Better Indoor Air Quality

*TVOC AT 28 DAYS

SD Static Dissipative

TARKETT SUSTAINABILITY TAG

95 % 61 %

100 % 17 %

<100mg/m³

Better Indoor Air Quality

*TVOC AT 28 DAYS

Veneto xf² 2mm

0200-0010-DoP-2013-07

http://professionals.tarkett.com

Manufactured by: Tarkett SpA

05036 Narni - ITALY

EN 14043:2004

Veneto xf² 2.5mm

0200-0001-DoP-2013-07

http://professionals.tarkett.com

Manufactured by: Tarkett SpA

05036 Narni - ITALY

EN 14043:2004

Veneto xf² B_a 2.5mm

0200-0014-DoP-2013-07

http://professionals.tarkett.com

Manufactured by: Tarkett SpA

05036 Narni - ITALY

EN 14043:2004

Veneto xf² 3.2mm

0200-0012-DoP-2013-07

http://professionals.tarkett.com

Manufactured by: Tarkett SpA

05036 Narni - ITALY

EN 14043:2004

Style Emme xf²

0200-0034-DoP-2013-07

http://professionals.tarkett.com

Manufactured by: Tarkett SpA

05036 Narni - ITALY

EN 14043:2004

Style Elle xf²

0200-0031-DoP-2013-07

http://professionals.tarkett.com

Manufactured by: Tarkett SpA

05036 Narni - ITALY

EN 14043:2004

Acoustic Cork xf² 4.0mm

0200-0024-DoP-2013-07

http://professionals.tarkett.com

Manufactured by: Tarkett SpA

05036 Narni - ITALY

EN 14043:2004

Acoustic Cork xf² 4.4mm

0200-0025-DoP-2013-07

http://professionals.tarkett.com

Manufactured by: Tarkett SpA

05036 Narni - ITALY

EN 14043:2004

Veneto Essenza 2.5mm

0200-0011-DoP-2013-07

http://professionals.tarkett.com

Manufactured by: Tarkett SpA

05036 Narni - ITALY

EN 14043:2004

Veneto Sicuro xf²

0200-0005-DoP-2013-07

http://professionals.tarkett.com

Manufactured by: Tarkett SpA

05036 Narni - ITALY

EN 14043:2004

Silencio xf² 3.8mm

0200-0027-DoP-2013-07

http://professionals.tarkett.com

Manufactured by: Tarkett SpA

05036 Narni - ITALY

EN 14043:2004

Etrusco xf²

0200-0020-DoP-2013-07

http://professionals.tarkett.com

Manufactured by: Tarkett SpA

05036 Narni - ITALY

EN 14043:2004

Linoleum xf² SD

0200-0017-DoP-2013-07

http://professionals.tarkett.com

Manufactured by: Tarkett SpA

05036 Narni - ITALY

EN 14043:2004

Tarkett ISO 14001

ENVIRONMENTAL MANAGEMENT SYSTEM

Tarkett ISO 14067

GREENHOUSE GASES - CARBON FOOTPRINT OF PRODUCTS

Tarkett ISO 9001

QUALITY SYSTEM

Tarkett BS OHSAS 18001

HEALTH AND SAFETY MANAGEMENT SYSTEM

RANGE OVERVIEW


	Colour name	Ref	2,0 mm	2,5 mm	3,2 mm	Silencio 3,8 mm	Essenza 4,5 mm	Sicuro xff R:10 2,5 mm	Veneto xff Bff 2,5 mm	Acoustic Cork xff 15db 4 mm	Acoustic Cork xff 15db 4,4 mm	Acoustic Cork Essenza 15db 4,4 mm	20 Grands Classiques	NCS code Linoleum	Unicolour welding rod	NCS code Unicolour welding rod	NCS Unicolour welding rod	Multicolour welding rod
VENETO	Durango	121		14872121		14892121								S3010-Y30R	1751121	S3010-Y10R		
	100% linen	400		14872400		14892400					14881400	14882400		S4020-Y30R	1751400	S4020-Y30R		
	Fossil	502		14872502		14892502								S4010-Y10R	1751502	S5010-Y10R		
	Tiger eye	524		14872524		14892524			14898524					S7020-Y40R	1751524	S7010-Y30R		
	Ivory	601		14872601		14892601								S2005-Y10R	1751601	S2010-Y10R		
	Travertine	603		14872603		14892603								S2502-G	1751603	S3005-G80Y		
	Pebble	604	14871604	14872604	14873604	14892604	1805604	1863604		14880604	14881604	14882604	•	S5502-Y	1751604	S5502-Y		14000604
	Smoke	608	14871608	14872608	14873608	14892608	1805608	1863608		14880608	14881608	14882608	•	S6502-Y	1751608	S6005-G80Y		14000608
	Charcoal	610	14871610	14872610	14873610	14892610	1805610	1863610		14880610	14881610	14882610	•	S8000-N	1751610	S8502-B		14000610
	Sisal	611	14871611	14872611	14873611	14892611	1805611	1863611		14880611	14881611	14882611	•	S2020-Y20R	1751313	S2020-Y10R		14000611
	Corn	612	14871612	14872612	14873612	14892612	1805612	1863612		14880612	14881612	14882612	•	S2040-Y10R	1751612	S1040-Y10R		14000612
	Coral	615		14872615		14892615								S2030-Y40R	1751615	S2020-Y30R		
	Camel	616	14871616	14872616	14873616	14892616	1805616	1863616		14880616	14881616	14882616	•	Y1020-Y30R	1751313	S2020-Y10R		14000616
	Eggshell	619		14872619		14892619	1805619	1863619						S1020-Y20R	1751619	S2020-Y10R		
	Sand	622		14872622		14892622								S2010-Y10R	1751119	S2010-Y20R		
	Azurite	624		14872624		14892624								S1515-Y20R	1751679	S2020-Y10R		
	Silk	625		14872625		14892625								S3010-Y30R	1751625	S3010-Y		
	Sunflower	628		14872628		14892628	1805628	1863628						S1070-Y20R	1751628	S1060-Y10R		
	Citrine	631		14872631		14892631								S2030-Y30R	1751631	S3020-Y30R		
	Chocolate	632		14872632		14892632								S7005-Y80R	1751632	S7005-Y80R		
	Pumpkin	633		14872633		14892633								S2030-Y50R	1751634	S3040-Y30R		
	Copper	634		14872634		14892634								S2040-Y40R	1751634	S3040-Y30R		
	Caramel	635		14872635		14892635								S2010-Y60R	1751635	S2020-Y40R		
	Amber	636	14871636	14872636	14873636	14892636	1805636	1863636	14898636	14880636	14881636	14882636	•	S2050-Y40R	1751636	S2060-Y30R		14000636
	Almond	637		14872637		14892637								S3005-Y50R	1751637	S3010-Y10R		
	Terracotta	641	14871641	14872641	14873641	14892641	1805641	1863641		14880641	14881641	14882641	•	S3060-Y70R	1751641	S3060-Y80R		14000641
	Salmon	642		14872642		14892642								S2050-Y60R	1751642	S2040-Y60R		
	Carmine	645		14872645		14892645								S1580-Y90R	1751645	S2070-Y90R		
	Grass	650	14871650	14872650	14873650	14892650	1805650	1863650		14880650	14881650	14882650	•	S4040-G30Y	1751650	S3050-G20Y		14000650
	Mint	651		14872651		14892651								S3040-B40G	1751651	S3040-B40G		
	Horizon	663	14871663	14872663	14873663	14892663	1805663	1863663		14880663	14881663	14882663	•	S4010-R90B	1751660	S4005-R80B		14000663
	Ocean	665		14872665		14892665	1805665	1863665						S5030-R90B	1751665	S5030-R90B		
	Lavender	670		14872670		14892670	1805670	1863670						S4020-R90B	1751670	S4020-R80B		
	Zinc	671	14871671	14872671	14873671	14892671	1805671	1863671		14880671	14881671	14882671	•	S4502-Y	1751671	S4502-G		14000671
	Aluminium	672	14871672	14872672	14873672	14892672	1805672	1863672		14880672	14881672	14882672	•	S4502-G	1751672	S4502-G		14000672
	Steel	673	14871673	14872673	14873673	14892673	1805673	1863673	14898673	14880673	14881673	14882673	•	S6000-N	1751673	S6005-B20G		14000673
	Slate	674	14871674	14872674	14873674	14892674	1805674	1863674	14898674	14880674	14881674	14882674	•	S8502-B	1751674	S8502-B		14000674
	Pale pink	678		14872678		14892678								S1515-Y70R	1751678	S2010-Y50R		
	Cork	679	14871679	14872679	14873679	14892679	1805679	1863679		14880679	14881679	14882679	•	S2020-Y20R	1751679	S2020-Y10R		14000679
	Platinum	684		14872684		14892684								S2502-Y	1751684	S3005-G80Y		
	Pewter	685		14872685		14892685								S4000-N	1751685	S3502-B		
	Concrete	686		14872686		14892686								S6502-B	1751686	S6005-B20G		
	Navy	688		14872688		14892688			14898688					S6030-R80B	1751068	S5030-R80B		
	Stone	692		14872692		14892692								S6502-G	1751692	S5502-G		
	Absinthe	695		14872695		14892695	1805695	1863695	14898695					S3040-G80Y	1751695	S2050-G60Y		
	White	700		14872700		14892700								S1005-Y20R	1751700	S2010-Y10R		
	Storm	702	14871702	14872702	14873702	14892702	1805702	1863702		14880702	14881702	14882702	•	S3502-Y	1751202	S4502-Y		14000702
	Fog	703		14872703		14892703								S4502-Y	1751703	S4502-Y		
	Ash	704		14872704		14892704			14898704					S5502-Y	1751907	S6500-N		
	Neutral	710	14871710	14872710	14873710	14892710	1805710	1863710		14880710	14881710	14882710	•	S2020-Y20R	1751679	S3010-Y10R		14000710
	Ecru	711	14871711	14872711	14873711	14892711	1805711	1863711	14898711	14880711	14881711	14882711	•	S2010-Y20R	1751679	S2020-Y10R		14000711
	Sandstorm	712		14872712		14892712								S2020-Y30R	1751313	S2020-Y10R		
	Taupe dark	714		14872714		14892714								S4005-Y20R	1751203	S5005-Y20R		
	Rust	739		14872739		14892739								S3050-Y50R	1751739	S4030-Y40R		
	Crimson	740		14872740		14892740			14898740					S3060-R	1751740	S3060-R		
	Granata	741		14872741		14892741								S5030-R20B	1751094	S6030-R		
	Begonia	742		14872742		14892742								S6030-R50B	1751049	S7020-R40B		

	Colour name	Ref	2,0 mm	2,5 mm	3,2 mm	Silencio 3,8 mm	Essenza 2,5 mm	Sicuro xF?? R10 2,5 mm	Veneto xF?? Bfl 2,5 mm	Acoustic Cork xF?? 15dB 4 mm	Acoustic Cork xF?? 15dB 4,4 mm	Acoustic Cork Essenza 15dB 4,4 mm	20 Grands Classiques	NCS code Linoleum	Unicolour welding rod	NCS code Unicolour welding rod	NCS Unicolour welding rod	Multicolour welding rod
VENETO	Burgundy	744		14872744		14892744								SS3060-R	1751744	S3060-Y90R		
	Sage	753		14872753		14892753	1805753	1863753						S3020-G40Y	1751753	S3030-G40Y		
	Apple green	754		14872754		14892754	1805754	1863754						S2050-G40Y	1751754	S3040-G40Y		
	Willow green	756		14872756		14892756								S5020-G10Y	1751756	S4020-G30Y		
	Grege	757		14872757		14892757								S6010-G70Y	1751757	S6020-G70Y		
	Sapphire	760		14872760		14892760								S4020-R90B	1751670	S5010-B70G		
	Periwinkle	761		14872761		14892761								S3030-B10G	1751761	S4030-B30G		
	Blue purple	762		14872762		14892762								S5040-R90B	1751665	S5030-R90B		
	Hyacinth	764		14872764		14892764								-	1751764	S4020-R70B		
	Deep blue	767		14872767		14892767	1805767	1863767						S6020-R90B	1751681	S6020-R80B		
	Grey	793	14871793	14872793	14873793	14892793	1805793	1863793	14898793	14880793	14881793	14882793	•	S2502-Y	1751793	S3005-G80Y		14000793
STYLE EMME	Graphite	906	14871906	14872906	14873906	14892906	1805906	1863906		14880906	14881906	14882906	•	S7500-N	1751686	S6005-B20G		14000906
	Burlap	911		14872911		14892911								S2005-Y40R	1751625	S3040-Y20R		
	Tumeric	919		14872919		14892919								S3050-Y20R	1751919	S3040-Y20R		
	Raspberry	945		14872945		14892945	1805945	1863945						S4040-Y90R	1751945	S4040-Y80R		
	Materia	200		14835200		14782200					14102200			S1505 Y10R	1751200	S2010-Y		
	Cenere	201		14835201		14782201					14102201			S3005 Y20R	1751201	S3010-Y20R		
	Cemento	202		14835202		14782202					14102202			S3502 Y	1751202	S4502-Y		
	Velluto	203		14835203		14782203					14102203			S5005 Y20R	1751203	S5005-Y20R		
	Ferro	205		14835205		14782205					14102205			S5502 Y	1751205	S6005-G80Y		
	Asfalto	207		14835207		14782207					14102207			S6502 G	1751207	S7005-G50Y		
	Sabbia	208		14835208		14782208					14102208			S1515 Y30R	1751313	S2020-Y10R		
	Abisso	209		14835209		14782209					14102209			S8500 N	1751209	S8505-B20G		
	Rosso	214		14835214		14782214					14102214			S1080 Y90R	1751214	S2070-Y90R		
	Verde	215		14835215		14782215					14102215			S2060 G60Y	1751215	S3060-G70Y		
	Vulcano	216		14835216		14782216					14102216			S7005 Y20R	1751216	S7010-G90Y		
	Mokka	217		14835217		14782217					14102217			S7005 Y50R	1751621	S7005-Y20R		
	Arancione	218		14835218		14782218					14102218			S1070-Y70R	1751037	S2060-Y60R		
	Giallo	219		14835219		14782219					14102219			S1050-Y10R	1751219	S2050-Y		
	Blue	220		14835220		14782220					14102220			S7020-R80B	1751220	S7020-R90B		
STYLE ELLE	Materia	300		14825300		14783300								S1505 Y10R	1751300	S2010-Y		
	Velluto	303		14825303		14783303								S5005 Y20R	1751303	S5005-Y20R		
	Ferro	305		14825305		14783305								S5502 Y	1751205	S6005-G80Y		
	Sabbia	308		14825308		14783308								S1515 Y30R	1751313	S2020-Y10R		
	Abisso	309		14825309		14783309								S8500 N	1751309	S9000-N		
	Rosso	314		14825314		14783314								S1080 Y90R	1751214	S2070-Y90R		
	Verde	315		14825315		14783315								S2060 G60Y	1751215	S3060-G70Y		
	Mokka	317		14825317		14783317								S7005 Y50R	1751621	S7005-Y20R		
	Arancione	318		14825318		14783318								S1070-Y70R	1751037	S2060-Y60R		
	Giallo	319		14825319		14783319								S1050-Y10R	1751219	S2050-Y		
	Blue	320		14825320		14783320								S7020-R80B	1751220	S7020-R90B		
ETRUSCO	Beige	002		14877002		14894002								S3010-G90Y	1751002	S3010-G70Y		
	Silver	003		14877003		14894003								S4502-B	1751013	S5000-N		
	Yellow	036		14877036		14894036								S2040-Y10R	1751036	S1050-Y10R		
	Orange	037		14877037		14894037								S2070-Y50R	1751037	S2060-Y60R		
	Red	041		14877041		14894041								S2070-Y90R	1751041	S2070-Y90R		
	Amaranth	042		14877042		14894042								S1080-R	1751744	S3060-Y90R		
	Iris	048		14877048		14894048								S5030-R60B	1751048	S5030-R60B		
	Rainforest	053		14877053		14894053								S3050-G30Y	1751053	S3050-G30Y		
	Emerald	054		14877054		14894054								S3040-B40G	1751054	S4040-B50G		
	Cyan	061		14877061		14894061								S3050-B	1751061	S3040-B		
	Indigo	066		14877066		14894066								S7020-R70B	1751066	S7020-R70B		
	Red berlin	094		14877094		14894094								S6030-Y90R	1751094	S6030-R		
	Anise	095		14877095		14894095								S2040-G50Y	1751095	S2060-G50Y		
	Black	098		14877098		14894098								S8502-B	1751098	S8502-B		
STATIC DISSIPATIVE	Dark grey	808		14995808										S8000-N	1751674	S8502-B		
	Abisso	809		14995809										S9000-N	1751209	S8505-B20G		

TECHNICAL SOLUTIONS

SD STATIC DISSIPATIVE xf²

Safe, sustainable flooring designed for static control near computer, electronic and telecommunications equipment in medical, manufacturing, education and industry environments. Available in rolls and cuts for raised floors.

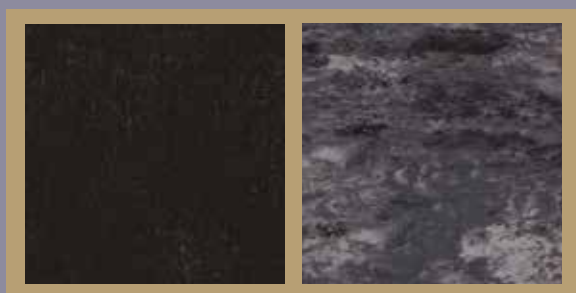

VENETO SICURO xf² R10

R10 slip resistant rating: combines the need for a secure grip with the ease of cleaning of xf².

VENETO B_{fl} xf²

2.5mm Linoleum B_{fl} fire rating, without flame retardants. Bfl by its natural ingredients. Ideal for escaping areas.

VENETO ESSENZA

The traditional factory-applied non-permanent finish, PU free.

LINOLEUM SILENCIO XFTM₂

2.5 mm linoleum with jute backing and 1.30 mm recycled polyurethane foam under layer, giving an excellent sound reduction of 18 dB. Silencio is now available on all colors and designs. Available in rolls and cuts for raised floors.

ACOUSTIC CORK 15dB

The natural solutions that provide a good acoustic insulation of 15dB – the best in the market with similar products - as well as high resistance to indentation.

Offered on demand in the following options

- a) Veneto xf² and Essenza: 2.5 mm linoleum with jute backing and Elafono cork underlayer
 - b) Veneto xf²: 2mm linoleum with jute backing and Elafono cork underlayer.
 - c) Style Emme xf²: 2.5 mm linoleum with jute backing and Elafono cork underlayer
- Available in rolls and cuts for raised floors.

ELAFONO

2.0 mm traditional, natural, corkment underlay to be installed in combination with any compact Tarkett linoleum to get added sound reduction (up to -14dB, depending on the product). Available in rolls of ≤30 x 2 m.


ACCESSORIES

LINOLEUM SET-ON SKIRTINGS (SOS)


- available in: 6/8 cm high x 220 cm long

LINOLEUM SET-IN SKIRTINGS (SIS)


- available in: 6/8/10 cm high x 10 cm width x 240 cm long
- also possible with 20 cm width onto the floor
- SIS outer corner available in:
 - 6/8/10 cm high x 10 cm width (size of the corner 13x13 cm)
- also possible with 20 cm width onto the floor



Lino SOS



Lino SIS



Lino SIS outer angle



Etrusco Cyan



Style Elle Rosso



Veneto 100% linen



Style Elle Ferro



Veneto Aluminium



Scan and join us to know more about Linoville!

■ **WESTERN EUROPE:** **Austria:** Tarkett Holding GmbH, Niederlassung Wien - Tel. +43 1 47 88 062 ■ **Belgium:** Tarkett France Belux - Tel. +32 16 35 98 80 ■ **Denmark:** Tarkett A/S - Tel. +45 43 90 60 11 ■ **Finland:** Tarkett Oy - Tel. +358 9 5406 5870 ■ **France:** Tarkett SAS - Tel. +33 1 41 20 42 49 ■ **Germany:** Tarkett Holding GmbH, Bereich Objekt - Tel. +49 62 33 810
 ■ **Greece:** Tarkett Monoprosopi Ltd - Tel. +30 210 6745 340 ■ **Italy:** Tarkett S.p.A. - Tel. +39 0744 7551 ■ **Luxembourg:** Tarkett GDL SA - Tel. +352 949 211 8804 ■ **Netherlands:** Tarkett Holding GmbH, Vestiging Nederland - Tel. +31 76 57 80 760 ■ **Norway:** Tarkett AS - Tel. +47 32 20 92 00 ■ **Portugal:** Tarkett SA - Tel. +351 21 427 64 20 ■ **Spain:** Tarkett Floors S.L - Tel. +34 91 358 00 35 ■ **Sweden:** Tarkett Sverige AB - Tel. +46 771 25 19 00 ■ **Switzerland:** Tarkett Holding GmbH, Bereich Objekt Schweiz - Tel. +41 043 233 79 24 ■ **Turkey:** Tarkett Aspen - Tel. +90 212 213 65 80
 ■ **United Kingdom:** Tarkett Ltd - Tel. +44 (0) 1622 854 040 ■ **EASTERN EUROPE:** **Baltic Countries:** Tarkett Baltics: Tel. +370 37 262 220 ■ **Czech Republic:** Tarkett France SAS, org. slozka - Tel. +420-271 001 602 ■ **Hungary:** Tarkett France SAS - Tel. +36 1 437 8150 ■ **Poland:** Tarkett Polska Sp. z o. o. - Tel. +48 22 639 31 68 ■ **Russian Federation:** ZAO Tarkett RUS - Tel. +7 495 775 3737
 ■ **Slovakia:** Tarkett France SAS, org. zlozka - Tel. +421 248 291 317 ■ **South East Europe:** Tarkett Trade d.o.o. - Tel. +381 21 7557 649 (44) 569 12 21 ■ **Ukraine:** Tarkett UA - Tel. +38 (0) 44 569 12 21
 ■ **ASIA AND OCEANIA:** **Australia:** Tarkett Australia Pty Ltd - Tel. +61 2 88 53 12 00 ■ **China:** Tarkett Floor Covering (Shanghai) Co. Ltd. - Tel. +86 (21) 60 95 68 38 ext 841 ■ **Hong Kong:** Tarkett Asia Pacific Ltd. - Tel. +852 2511 8716 ■ **India:** Tarkett France (India Branch) - Tel. +91 11 4352 4073 ■ **South East Asia:** Tarkett Asia Pacific Ltd - Tel. +65 97 57 36 45 ■ **AFRICA:** Tarkett International: Tel. +33 1 41 20 41 01 ■ **MIDDLE EAST:** Tarkett Middle East: Tel. +961 1 51 3363/4 ■ **Israel:** Tarkett International: Tel. +33 1 41 20 41 01 ■ **NORTH AMERICA:** **USA:** Tarkett Inc. - Tel. +1 713 869 5811 / Johnsonite - Tel. +1 440 543 8916 ■ **Canada:** Tarkett Inc. - Tel. +1 450 293 173 ■ **LATIN AMERICA:** **Brazil:** Tarkett Fademac - Tel. 55 12 3954 7108 ■ **Other countries:** Tarkett America Latina - Tel. +55 11 3047 7200 ■ **Argentina - Chile - Uruguay:** Tarkett Latam Mercosur - Tel. 54 11 48 06 74 28 / 54 9 11 44 46 88 82 ■ **Colombia - Panama - Caribbean:** Tarkett Latam Andina - Tel. 57 1 759 5781 / 57 312 273 1566 ■ **Bolivia - Ecuador - Paraguay - Peru:** Tarkett Latam Sur Oeste - Tel. 55 11 3047 7233 ■ **Mexico / Central America:** Tarkett Latam Mexico - Tel. 52 735 35 63 918 / 52 55 51 07 9524



Tarkett

professionnals.tarkett.com