


SAFETRED SPECTRUM




Safetred Spectrum
Riviera / Silver




Silver

3819 800
3792 800



Shale

3819 805
3792 805



Battleship

3819 810
3792 810



Ecrue

3819 815
3792 815




Sepia

3819 820
3792 820




Russet

3819 825




Verdi Gris

3819 830
3792 830




Emerald

3819 835




Olive

3819 840



Riviera

3819 845
3792 845




Cobalt

3819 850
3792 850




Denim

3819 855




Sky

3819 860



Violet

3819 865




Pistachio

3819 890

TECHNICAL DATA	STANDARDS	Safetred Spectrum
Classification		
Type of floor covering	EN 13845	Heterogeneous safety floorings
Classification	EN 13845 commercial industrial	Classes: 34 43
Characteristics		
Total thickness	ISO 24346 (EN 428)	2.00mm
Total weight	ISO 23997 (EN 430)	3 230g/m ²
Safety Clean XP™ PUR reinforcement	—	Yes
Technical performances		
Abrasion	EN 13845 Annex D	≤10% particle loss after 50,000 cycles
Residual indentation	ISO 24343-1 (EN 433) requirement	≤ 0.10mm
Furniture leg	EN 424	No damage
Castor chair	ISO 4918 (EN 425)	No damage
Dimensional stability	ISO 23999 (EN 434)	≤ 0.40%
Curl resistance to heat	ISO 23999 (EN 434)	≤ 2mm
Reaction to fire	EN 13501-1	B _s s1 on cement
Slip resistance	TRRL Pendulum 4S (wet) BS 7976 part 2 DIN 51130 Surface Roughness Rz	> 36 R10 > 20µm
Impact sound reduction	EN ISO 10140-3 EN ISO 717/2	ΔL _w = 4dB
Electrical resistance	EN 1815 EN 1081 EN 14041	< 2kV on concrete > 10 ⁹ ohms. Antistatic on concrete
Light fastness	EN ISO 105-B02	7
Chemical resistance	ISO 26987 (EN 423)	Good resistance to everyday substances
Hygiene	—	Does not contribute to infection spreading
Thermal resistance Underfloor heating	EN 12524	0.01m ² K/W Suitable - Max 27°C

The above information is subject to modifications for the benefit of further improvement (07/2016).
For more detailed technical information, please contact Tarkett.

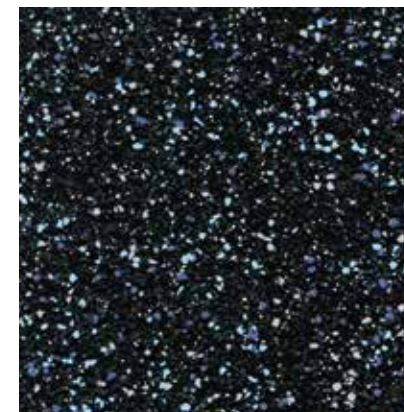

Onyx

3819 895
3792 895

SAFETRED SPECTRUM

Main Product Features

- Heavy duty general purpose for domestic and commercial areas
- R10 slip resistance
- Mix and match designs in rolls and tiles
- More flexibility with tiles (50 x 50cm) with excellent dimensional stability without welding
- Safety Clean XP™ PUR reinforced surface for easy maintenance
- Sustainable slip resistance throughout product life

Surface Treatment



Sustainability Tag



Logistics Information

Available in rolls
Rolls length: 20lm

Laying direction:



Available in tiles

Laying direction:



General Information

