

600	910	950
920	700	

Extravagance

5/16" gesneden pool

**100% micro polyester
Solution Dyed**

RUG
Twinback®

POOLHOOGTE
± 16 mm

TOTALE HOOGTE
± 20 mm

POOLGEWICHT
± 1.760 g/m²

TOTAAL GEWICHT
± 2.600 g/m²

AANTAL NOPPEN/M²
± 21.000

LICHTECHTHEID
≥ 5

WATERECHTHEID
≥ 4-5

WARMTEDOORLAATWEERST.
± 0,36 m² K/W

BRANDKLASSE
Efl (EN 13501-1)

5/16" velours coupé

**100% micro polyester
Solution Dyed**

DOSSIER
Twinback®

HAUTEUR DU VELOURS
± 16 mm

HAUTEUR TOTALE
± 20 mm

POIDS DU VELOURS
± 1.760 g/m²

POIDS TOTAL
± 2.600 g/m²

NOMBRE DE POINTS/M²
± 21.000

RÉSISTANCE À LA LUMIÈRE
≥ 5

RÉSISTANCE À L'EAU
≥ 4-5

RÉSISTANCE THERMIQUE
± 0,36 m² K/W

CLASSEMENT FEU
Efl (EN 13501-1)

5/16" Schnittpol

**100% micro polyester
Solution Dyed**

RÜCKEN
Twinback®

POLHÖHE
± 16 mm

GESAMTHÖHE
± 20 mm

POLGEWICHT
± 1.760 g/m²

GESAMTGEWICHT
± 2.600 g/m²

NOPPEN/M²
± 21.000

LICHTECHTHEIT
≥ 5

WASSERECHTHEIT
≥ 4-5

WÄRMEDURCHLASSWIDERST.
± 0,36 m² K/W

BRANDKLASSE
Efl (EN 13501-1)

5/16" cutpile

**100% micro polyester
Solution Dyed**

BACKING
Twinback®

PILE HEIGHT
± 16 mm

TOTAL HEIGHT
± 20 mm

PILE WEIGHT
± 1.760 g/m²

TOTAL WEIGHT
± 2.600 g/m²


TUFT DENSITY/M²
± 21.000

LIGHT FASTNESS
≥ 5

WATER RESISTANCE
≥ 4-5

THERMAL RESISTANCE
± 0,36 m² K/W

FIRE CLASS
Efl (EN 13501-1)

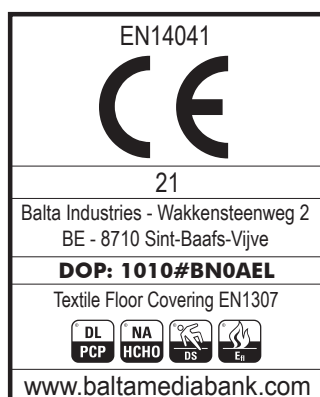

	600	700	910	920	950
ca 4m	•	•	•	•	•



600



950



910



920



700