


ACCZENT EXCELLENCE 70 TOPAZ



Clic - Beige

Clic

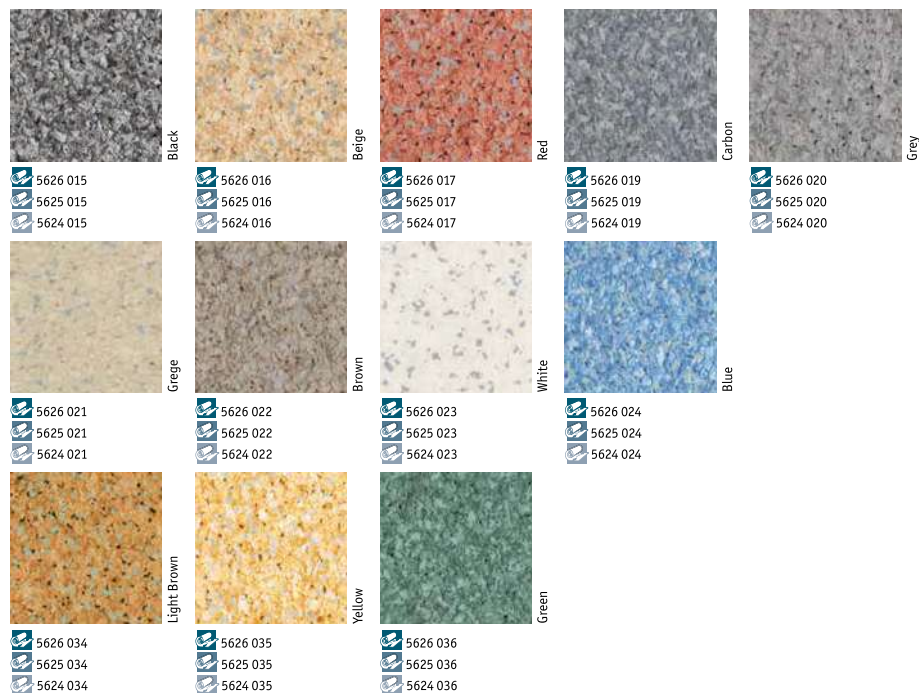

TECHNICAL DATA	STANDARDS	Accent Excellence 70 Topaz
Classification		
Type of floor covering	ISO 10582	Heterogeneous Compact Vinyl
Classification	ISO 10874 (EN 685) commercial industrial	Classes: 34 43
Characteristics		
Total thickness	ISO 24346 (EN 428)	2.50mm
Wear layer thickness	ISO 24340 (EN 429)	0.70mm
Total weight	ISO 23997 (EN 430)	2 900g/m ²
PU treatment	-	TopClean™
Wear layer binder content	ISO 10582	Type I
Technical performance		
Residual indentation	Average measured value ISO 24343-1 (EN 433) requirement	≤ 0.10mm
Reaction to fire	EN 13501-1	C _{fl} -s1
Slip resistance	DIN 51130 EN 13893	R10 μ ≥ 0.30
Dimensional stability	ISO 23999 (EN 434)	≤ 0.10%
Furniture leg	EN 424	No damage
Castor wheel test	ISO 4918 (EN 425)	No damage
Curl resultant to heat	ISO 23999 (EN 434)	≤ 8mm
Electrostatic properties	EN 1815 EN 1081	≤ 2kV on concrete R1 > 10 ⁹ ohms
Chemical resistance	ISO 26987 (EN 423)	High resistance
Hygiene	-	Does not contribute to infection spreading
Thermal resistance Underfloor heating	EN ISO 10456	0.02m ² K/W Suitable
Light fastness	EN ISO 105-B02	≥ 6
Impact sound reduction	Standards EN ISO 10140-3 EN ISO 717/2	ΔLw = 13dB

The above information is subject to modifications for the benefit of further improvement (02/2017).
For more detailed technical information, please contact Tarkett.



5626 018
5625 018
5624 018

ACCZENT EXCELLENCE 70 TOPAZ Clic

Main Product Features

- Warmth and comfort
- Very comfortable flooring with 13dB acoustic
- 2.5mm total thickness
- Available in 2, 3 and 4 meter widths


Surface Treatment



Sustainability Tag



Logistics Information



Available in rolls:
2m, 3m & 4m
Rolls length: 24lm

Laying direction:



General Information




According to European
Classification ISO 10874 (EN 685)

ACCZENT EXCELLENCE 70 TOPAZ




Antik Oak - Light Brown

Soft Elm



Brown


5626 001
5625 001
5624 001



Natural

5626 028
5625 028
5624 028

Antik Oak



Light Natural

5626 027
5625 027
5624 027



Light Brown

5626 005
5625 005
5624 005



White

5626 026
5625 026
5624 026

Arcadia



Light Yellow

5626 032
5625 032
5624 032



Brown Natural

5626 030
5625 030
5624 030



Light Greige

5626 031
5625 031
5624 031



Beige Yellow

5626 025
5625 025
5624 025



Light Natural

5626 006
5625 006
5624 006

Beech

TECHNICAL DATA	STANDARDS	Accent Excellence 70 Topaz
Classification		
Type of floor covering	ISO 10582	Heterogeneous Compact Vinyl
Classification	ISO 10874 (EN 685) commercial industrial	Classes: 34 43
Characteristics		
Total thickness	ISO 24346 (EN 428)	2.50mm
Wear layer thickness	ISO 24340 (EN 429)	0.70mm
Total weight	ISO 23997 (EN 430)	2 900g/m ²
PU treatment	-	TopClean™
Wear layer binder content	ISO 10582	Type 1
Technical performance		
Residual indentation	Average measured value ISO 24343-1 (EN 433) requirement	≤ 0.10mm
Reaction to fire	EN 13501-1	C _s -s1
Slip resistance	DIN 51130 EN 13893	R10 μ ≥ 0.30
Dimensional stability	ISO 23999 (EN 434)	≤ 0.10%
Furniture leg	EN 424	No damage
Castor wheel test	ISO 4918 (EN 425)	No damage
Curl resultant to heat	ISO 23999 (EN 434)	≤ 8mm
Electrostatic properties	EN 1815 EN 1081	≤ 2kV on concrete R1 > 10 ⁹ ohms
Chemical resistance	ISO 26987 (EN 423)	High resistance
Hygiene	-	Does not contribute to infection spreading
Thermal resistance Underfloor heating	EN ISO 10456	0.02m ² K/W Suitable
Light fastness	EN ISO 105-B02	≥ 6
Impact sound reduction	Standards EN ISO 10140-3 EN ISO 717/2	ΔLw = 13dB

The above information is subject to modifications for the benefit of further improvement (02/2017).
For more detailed technical information, please contact Tarkett.

Arcadia



Middle Natural

5626 029
5625 029
5624 029

ACCZENT EXCELLENCE 70 TOPAZ Wood

Main Product Features

- Warmth and comfort
- Very comfortable flooring with 13dB acoustic
- 2.5mm total thickness
- Available in 2, 3 and 4 meter widths

Surface Treatment



Sustainability Tag



Logistics Information



Available in rolls:
2m, 3m & 4m
Rolls length: 24lm

Laying direction:



Wood

General Information



According to European
Classification ISO 10874 (EN 685)